

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

## **IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.

**THIS PAGE BLANK (USPTO)**



INVESTOR IN PEOPLE

#  
2

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated: 19 January 2001

**THIS PAGE BLANK (USPTO)**

Patents Form 1/77  
(Rule 1)



# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

R.J. SPOONER 1

2. Patent application number

(The Patent Office will fill in this part)

0006291.9

15 MAR 2000

3. Full name, address and postcode of the or of each applicant (underline all surnames)

16 MAR 00 0521723-1 000082  
LUCENT TECHNOLOGIES INC  
600 Mountain Avenue  
Murray Hill  
New Jersey 07974-0636  
United States of America

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

Delaware/USA

7039555001 IS

4. Title of the invention

DATA COMMUNICATION LINK

5. Name of your agent (if you have one)

C.S.T. BUCKLEY

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

LUCENT TECHNOLOGIES UK LIMITED  
5 Mornington Road  
Woodford Green  
Essex IG8 OTU  
England

3939003 IS

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

YES

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

|             |       |
|-------------|-------|
| Description | 8     |
| Claim(s)    | 2     |
| Abstract    | 1     |
| Drawing(s)  | 4 + 4 |

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 1

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

*C. S. T. Buckley*

13 March 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

C. S. T. BUCKLEY

0181-504 2824

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Statement of inventorship and of  
right to grant of a patent



The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

R.J. SPOONER 1

2. Patent application number  
(if you know it)

0006291.9

15 MAR 2000

3. Full name of the or of each applicant

LUCENT TECHNOLOGIES INC

4. Title of the invention

DATA COMMUNICATION LINK

5. State how the applicant(s) derived the right  
from the inventor(s) to be granted a patent

By employment

6. How many, if any, additional Patents Forms  
7/77 are attached to this form?  
(see note (c))

7. I/We believe that the person(s) named over the page (and on  
any extra copies of this form) is/are the inventor(s) of the invention  
which the above patent application relates to.

Signature

Date

13 March 2000

8. Name and daytime telephone number of  
person to contact in the United Kingdom

C.S.T. BUCKLEY

0181-504 2824

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Robert John Spooner  
66 Marefield  
Lower Earley,  
Reading  
Berkshire  
RG6 3DZ

Patents ADP number (if you know it): 7854730001

15

Patents ADP number (if you know it):

Reminder

Have you signed the form?

Patents ADP number (if you know it):



## DATA COMMUNICATION LINK

- 5 The present invention relates to a data communication link for high speed, high bandwidth applications.

In applications such as providing a data communication link between two Application Specific Integrated Circuits (ASICs) in a local backplane of a computing system, very high  
10 data rates may be required, e.g. an average data rate of at least 4.8 Giga bits per second (Gbps). The data link may be 64 bits wide.

Of the various possibilities for implementing such a link, it is possible to provide an interface that transfers data from the transmitting ASIC to the receiving ASIC as a single parallel word  
15 with a synchronising clock signal running at the system clock rate CK, say 78 MHz. However, for a data word of 64 bits to achieve a data transfer rate of 4.8 Gbps this would require 65 device pins, which for many applications would be either impractical or too costly to provide in the ASICs.

20 A synchronous interface could be used using a smaller number of pins, by multiplexing a 64 bit wide data word N times onto W bits ( $= 64/N$ ) and by providing a synchronising clock. However with a clock signal running at 78 MHz, the bandwidth would be reduced to  $W * CK = BW/N$ , which would give an unacceptably slow data transfer rate.

25 In order to achieve a bandwidth of 4.8 Gbps, the transfer rate may be multiplied N times. A synchronous interface which has a resultant Transfer Clock,  $N * CK$ , of less than 200 MHz may be practical. Above 200 MHz, which would be necessary to achieve the desired transfer rate of 4.8 Gbps, each data bit would be valid for a maximum of 5 ns, reducing further when rise-fall times of the interconnect signals and input/output buffers are included. The task of  
30 achieving a robust design, ensuring that all W bits are aligned such that the synchronising clock can always capture valid data bytes at the receiving ASIC, is far from trivial.

## Summary of the Invention

5 With a view to avoiding the above noted problems, the invention provides a data communication link for connection between two Application Specific Integrated Circuit (ASIC) devices that is capable of transferring wide data words at high speed. In the invention, these wide data words are considered as existing internally within each ASIC as a number of smaller sub-data words in parallel. Therefore;

10 
$$DW = W * N$$

Where;

$DW$  = Bit width of wide data word

$W$  = Bit width of sub-data word

$N$  = An integer value, greater than 1

15 The data bandwidth across the link is given as;

$$BW = DW * CK$$

Where;

$BW$  = Bandwidth in Mega bits per second (Mbps)

$CK$  = Transfer Clock in Mega Hertz (MHz)

20 For example,  $W = 8$ ,  $N = 8$ ,  $DW = 64$ . The Transfer Clock,  $CK$ , is 78 MHz giving a  $BW$  of 4992 Mbps. However the invention is not limited to these specific values.

In general terms, the invention provides a data communication link for connecting first and second devices which have a system clock, the link including transmitting means for dividing  
25 an input word into a predetermined number of smaller words, and for providing a transfer clock having a high rate relative to the system clock, and including a predetermined number of sub-links, for transmitting a respective smaller word in serial form at the transfer clock rate, and means for receiving the serial words and for converting the serial words to a parallel form, including word alignment means, responsive to the system clock, for aligning said  
30 smaller words to reconstitute the input word.

As preferred, the transmitting means includes a parallel to serial register for each smaller word, the transfer clock clocking the data from the parallel to serial register to provide high speed serial data transmission across the sub-link.

At the receive side, a serial to parallel converter is provided in each sub-link comprising a register for receiving the incoming serial data smaller word and means responsive to the incoming data for generating a low speed clock signal therefrom, nominally equal to the frequency of the system clock, and a serial to parallel register responsive to the low speed clock for providing at an output a parallel version of the smaller word.

The low speed clock will have the same nominal frequency as the system clock, and, although aligned with the system clock to within one clock cycle, will suffer from phase jitter. In order to assemble the large number of smaller data words received into the original form of the input word, a first step which is necessary is to align the bits within each sub-link. This is effected by a bit alignment means, which comprises, on the transmit side means for sending at least two sequential initialisation words, each word having the property that no matter how many times the word is shifted left or right, there is a unique position which defines a bit alignment. Thus, by providing at the receive side a register which is at least two words wide, the position within the register of the initialisation words can be located by means of a state machine, and forwarded to the succeeding stages. The initialisation words are followed by true data words, and all the words are conveniently stored in a buffer memory, conveniently a First In First Out (FIFO) register. The words are clocked in at the recovered clock rate, but are clocked out by the system clock reference, which is approximately the same as the recovered clock, but there may be differences due to phase jitter, etc. The words are monitored as they are clocked into the FIFO register so that the words may be clocked out, when it is known all words are present, by means of the system clock as a single wide parallel word. As preferred, each FIFO register is addressed with an addressing scheme in which only one bit changes for each incremental address location. This is known as a Johnson Addressing Scheme. This permits one of the address bits to be monitored and ORed with corresponding address bits from the other FIFO registers in order to provide an alignment trigger signal when the first word is received. Since the other words will follow within one clock cycle, this trigger is provided to the output of the FIFO registers for providing a read cycle from the output of all registers.

## Brief Description of the Drawings

5 A preferred embodiment of the invention will now be described with reference to the accompanying drawings wherein:-

**Figure 1** is a schematic view of the transmit interface of a first ASIC of the data communication link of the invention;

10 **Figure 2** is a schematic block diagram of the receive interface of a second ASIC of the data communication link of the invention;

**Figure 3** is a more detailed diagram of the control mechanism for aligning received words in each sub-link of the link of **Figures 1** and **2**; and

**Figure 4** is a schematic block diagram of a Clock Data Recovery Module (CDRM) used in both the interfaces of **Figures 1** and **2**.

15

## Description of the Preferred Embodiment

Referring to **Figures 1** and **2** of the drawings, a Link Interface between first and second ASICs 2, 4 includes an interface 6 in ASIC 2, which has a register 8 for breaking down the  
20 wide input data words, DW, into N (in this embodiment 8) smaller sub-words W (each 8 bits long). Each sub-word W is treated independently, using a Clock Data Recovery Module 10 (CDRM) macrocell. CDRM 10 has a multiplier 12 for multiplying the clock CK, W (8) times and respective parallel to serial (PISO) converters 14 for operating on each of N, W bit words. Each serial word is transmitted over a respective sub-link 16.

25

Referring to **Figure 2**, the receive ASIC 4 has an interface 20. The serial links 16 are coupled to another CDRM macrocell 22, in which a parallel W bit word and clock is recovered for each of the N serial links.

30

**Figure 4** shows in more detail a CDRM 10, 22. The module 10, 22 has two primary functions. In transmit, it takes Low Speed Parallel Data (LDTX) on line 40 and creates High Speed Serial Data (HDTX) on line 42. In receive, it operates in reverse, taking High Speed Serial Data (HDRX) on line 44 and creating Low Speed Parallel Data (LDRX) on line 46. In

addition, the receive operation also recovers a Low Speed Clock (LDCK) on line 48 from the serial data, that is phase aligned with the LDRX data. A Reference System Clock (REFCK) on line 49 is applied to a Phase Locked Loop 50 which multiplies the clock rate by a factor of 8 to provide a High Speed Clock (HSCK) on line 52. HSCK is applied to a parallel to serial register 54 and to a serial to parallel register 56. HSCK is also applied to a divide by 8 unit 58 and a chain of three toggles 60. The outputs of toggles 60 are detected by an edge detector device 62 which provides an output to divider unit 58. The output of divider unit 58 comprises the Low Speed Clock (LDCK) on line 48. The operation of the circuit of **Figure 4** is as follows:

For **Transmit**, Low Speed Data (LDTX) on line 40 will be presented to the CDRM at the rate of the Reference Clock (REFCK). The Reference Clock will be multiplied in frequency eight times by Phase Locked Loop (PLL) 50 to create High Speed Clock (HSCK) on line 52. LDTX data on line 40 will be loaded into a Parallel Serial Output (PISO) register 54 at the REFCK rate, and clocked out serially at the HSCK rate to form HDTX data on line 42.

For **Receive**, the High Speed Clock (HSCK) will be divided by eight at 58 to create a Low Speed Clock (LDCK) output. However, the phase of this clock must be adjusted so that its associated Low Speed Data (LDRX) is stable at the time of the active edge of LDCK. This is done by edge detection and phase adjustment circuit 60, 62 which monitors the High Speed Data (HDRX) on line 44. HDRX is also passed into a Serial Parallel Output (SIPO) register 56 to create the Low Speed Received Parallel Data (LDRX) on line 46. The output from the SIPO 56 will be enabled on the opposite edge to the active edge of its associated clock LDCK.

The number of transmit and sub-links are replicated 8 times in this example. However, there will generally only be a single PLL per CDRM macrocell.

On the receive side, the serial links are passed through CDRM macrocell 22, and a W bit word and clock will be recovered for each of the N serial links. The CDRM 22 has no knowledge of the boundary between one W bit word and the next within the serial data stream and it is therefore the first task of the Interface 20 to identify the correct bit alignment within each sub-link. Having recovered the W bit words for each sub-link, all N of the W bit words have to be aligned and synchronised to recreate the original DW width word.

The bit alignment is achieved by the transmit side sending consecutive initialisation words constructed by ASIC 2. These initialisation words (of  $W$  bits) have the property that however many times the word is shifted right or left within another word that is  $2W$  bits wide, there is a unique position that defines the bit alignment. For example consider an initialisation word, for  $W = 8$ , of "10111000". A register 24 that is  $2W$  words wide holds the previously received and

| Previous & Current Word | Bit Alignment |
|-------------------------|---------------|
| 10111000xxxxxxxx        | 0             |
| x10111000xxxxxxx        | 1             |
| xx10111000xxxxxx        | 2             |
| xxx10111000xxxxx        | 3             |
| xxxx10111000xxxx        | 4             |
| xxxxx10111000xxx        | 5             |
| xxxxxx10111000xx        | 6             |
| xxxxxxx10111000x        | 7             |

currently received words of  $W$  bits as shown in the above table. The initialisation word is sent at least twice followed by another synchronisation word (user defined) delimiter to indicate the start of transmission of true data. The position of the word is located in the register by means of a state machine (not shown) and this information is relayed to subsequent stages.

During transmission, each ASIC transmitting/receiving interface will respectively create/recreate a CRC from the true data. The CRC words are inserted at a pre-determined interval, programmed to both transmit and receive sides. After this interval the transmitted CRC should equal the recreated CRC. If not, then either bit alignment has been lost or a corruption has occurred during the transmission of the data. This provides an Integrity Check individually on each of the serial links.

Thus, as shown in **Figure 2**, subsequent to parallel conversion in CDRM 22, the parallel words are placed in a bit alignment register 24 in each sub-link for detecting bit alignment. This is effected by a state machine (not shown) locking onto the position of the initialisation word within the register, and passing the bit aligned word to the next stage. In the next stage,  
 5 an Integrity Check is performed on the CRC word at 26.

The bit alignment and the Integrity Check are performed in each sub-link using the recovered clock generated for that serial link. There is no guarantee of any phase relationship between any of the N recovered clock (RCK[n])s, and each of the recovered clocks may be jittering  
 10 (except that the recovered clocks will be within one clock cycle of one another). However, the average frequency of all recovered clocks and that of the Transfer Clock, CK, on the transmit side must be exactly the same, since the reference clock to both the transmit and receive ASICs will be driven from the same crystal oscillator. A mechanism is therefore required to re-align the N recovered sub-words and resynchronise the wide data word back to  
 15 the Transfer Clock, CK. This is done by using a short First In First Out (FIFO) 28, 6 words long, at the end of each serial link.

The recovered sub-word plus a marker bit ( $W + 1$  bits) is written to the FIFO 28 by its associated recovered clock on line 48. The marker bit indicates whether that data word was  
 20 Transmitted Synchronisation or Integrity Check Word. The very first word to be written by each of the links, will be a synchronisation word (marker bit set) and the second will be the first sub-word of true data. The first write will occur at a slightly different time for each link, but by the time the second write occurs, all will have written at least once. The addressing of the FIFOs use Johnson coding, as more clearly seen in **Figure 3**. An address generator 32  
 25 provides a Johnson scheme of addressing to the write read address 34 of the respective FIFO 28.

The initial value of the address is 011 and the address scheme changes as indicated in **Figure 3**. The most significant bit of the addresses of the sub-links are coupled by lines 36 to an OR  
 30 gate 38. The output of the OR gate 38 is coupled by two metastability registers 70 to provide a trigger signal on line 72 to a state machine 74. State machine 74 provides an output on line 76 to control the reading out of the FIFO registers 28.

Thus, only a single address bit of FIFO's 28 changes per write and by ensuring that the top address bit is set on the second write, that address bit can be logically OR'd with the equivalent bit from all N links. This single bit signal, which goes high when the first word in a sub-link is received, is resynchronised via the metastability registers 70. By this time, since  
5 it is known all FIFO registers will be written to within a clock cycle of one another, all FIFO's will contain words, and the state machine 74 triggers the Word Aligner to read from all N FIFO's in parallel at the Transfer Clock rate, CK. This read should therefore occur when each of the FIFOs contain approximately four words. As the average frequency of the read and write clocks to the FIFO is the same each FIFO should always contain  
10 approximately four words. A FIFO that is at least six deep will isolate against jitter on the recovered clocks.

The very first FIFO read will all be synchronised sub-words but the second will be the recovery of the first true wide data word. The output of the FIFOs are applied to a Word  
15 Aligner register 78 which reconstitutes the original data word 80 (Figure 2). Word Alignment is checked at the same programmed interval used by the bit alignment, because at this time, and only at this time, all of the marker bits in each of the N FIFO's will be set.

The scheme outlined provides a robust high speed, high bandwidth local link by using a  
20 number of serial asynchronous links in parallel.



## Claims

- 5 1. A data communication link for connecting first and second devices which have a system clock, the link including transmitting means for dividing an input word into a predetermined number of smaller words, and for providing a transfer clock having a high rate relative to the system clock, and including a predetermined number of sub-links, for transmitting a respective smaller word in serial form at the transfer clock rate, and means for receiving the serial words and for converting the serial words to a parallel form, including word alignment means, responsive to the system clock, for aligning said smaller words to reconstitute the input word.  
10
2. A link according to claim 1, wherein the first and second devices each comprise an ASIC device, the transmitting means comprising an interface of the first ASIC device and the receiving means comprising an interface of the second ASIC device.  
15
3. A device according to claim 1 or 2, wherein the means for transmitting comprises a parallel to serial register, and including means for generating the transfer clock coupled to the serial to parallel register for clocking serial words out of the register.  
20
4. A communication link according to any preceding claim, including transfer clock generating means comprising a Phased Locked Loop for receiving as an input the system clock.  
25
5. A communication link according to any preceding claim, wherein the receiving means for each sub-link comprises a serial to parallel register for receiving incoming serial words and converting them to parallel form, and means for generating a low speed clock from the incoming data with a frequency nominally equal to the system clock frequency.  
30

- 5 6. A data communication link according to claim 5, wherein the low speed clock generating means includes edge detection means for detecting incoming data and for providing an output to a dividing means for aligning the low speed clock with recovered data and for applying the same to the serial to parallel register for clocking out parallel words from the register.
- 10 7. A data communication link according to any preceding claim, wherein the transmitting means includes means for generating bit alignment words, and the receiving means includes a bit alignment register for storing the bit alignment words in order to locate the position of the bits in the register.
- 15 8. A data communication link according to any preceding claim, wherein the receiving means includes means for generating a cyclic redundancy code word and for transmitting the same at intervals, and the receiving means including check means for checking the cyclic redundancy code word.
- 20 9. A data communication link according to any preceding claim, including a buffer memory in each sub-link for storing a predetermined number of received words, and means for reading the buffer memories in synchronism under control of the system clock in order to reconstitute the input data word.
- 25 10. A data communication link according to claim 9, wherein the buffer memories each comprises a FIFO register.
- 30 11. A data communication link according to claim 10, wherein the FIFO registers are addressed by an addressing scheme wherein only one bit of the address changes for incremental addresses.
12. A data communication link according to claim 11, wherein a predetermined bit of the address of each FIFO are compared and employed to generate a trigger signal for actuating a state machine to cause reading of the FIFO registers.

## **Abstract**

### **5 Data Communication Link**

In order to enable high speed, high bandwidth data transfer between two ASIC devices for example in a backplane, a wide parallel input data word is divided into a smaller number of words, and each smaller word is converted to serial form and then transmitted over a  
10    respective sub-link at a high clock rate relative to the system clock. At the receiving side, the clock is recovered from the serial words, and the serial words are converted back to parallel form. An alignment process is then carried out, firstly involving detecting the positions of the bits of the words and then storing the words in a buffer FIFO register. The words are clocked  
15    out of the FIFO register in synchronism under control of the system clock once it is detected that valid words are received in the FIFO registers.

**[Figure 2]**

**THIS PAGE BLANK (USPTO:**

1/4

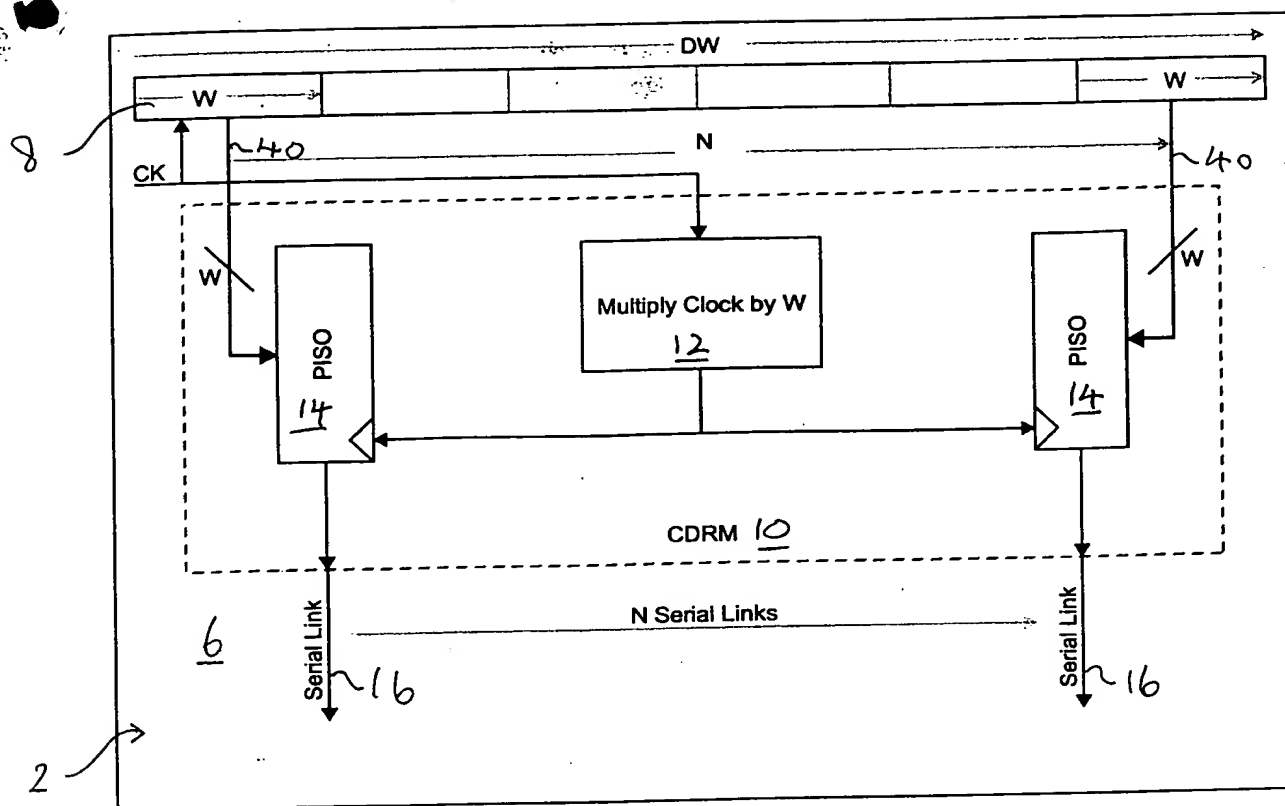


Figure 1 - Link Interface Transmit

**THIS PAGE BLANK (USPTO)**

2/4

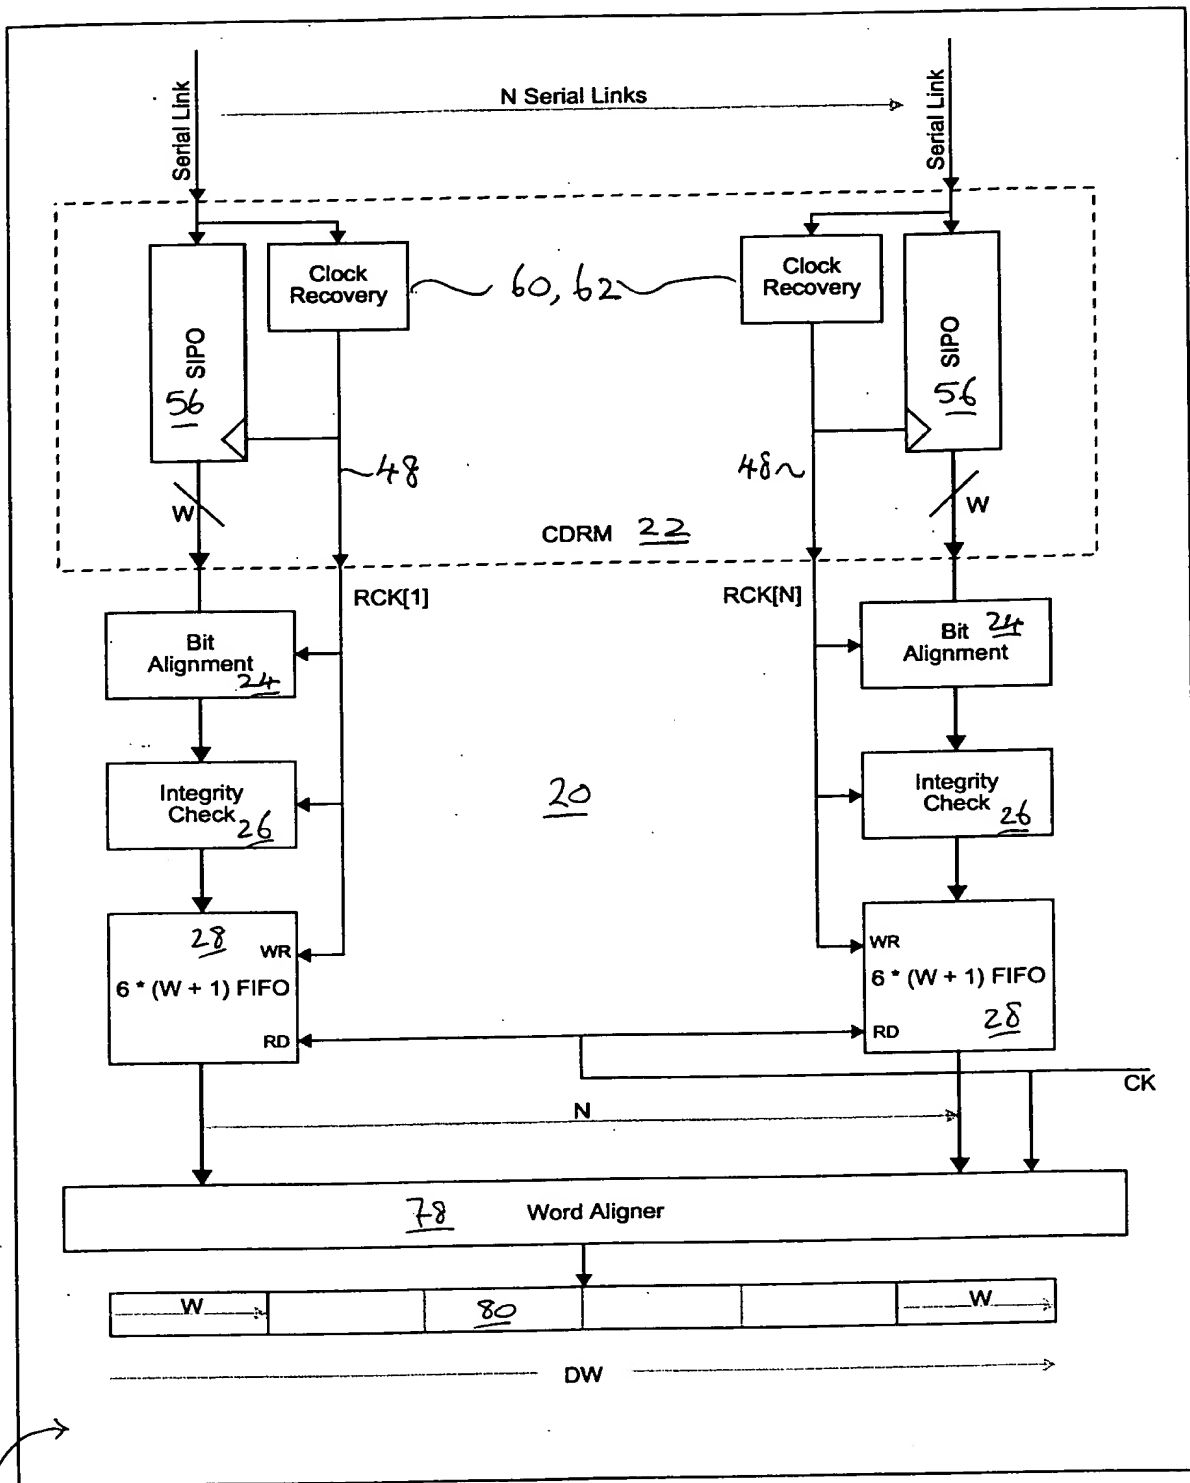


Figure 2 - Link Interface Receive

START

**THIS PAGE BLANK (USPTO)**



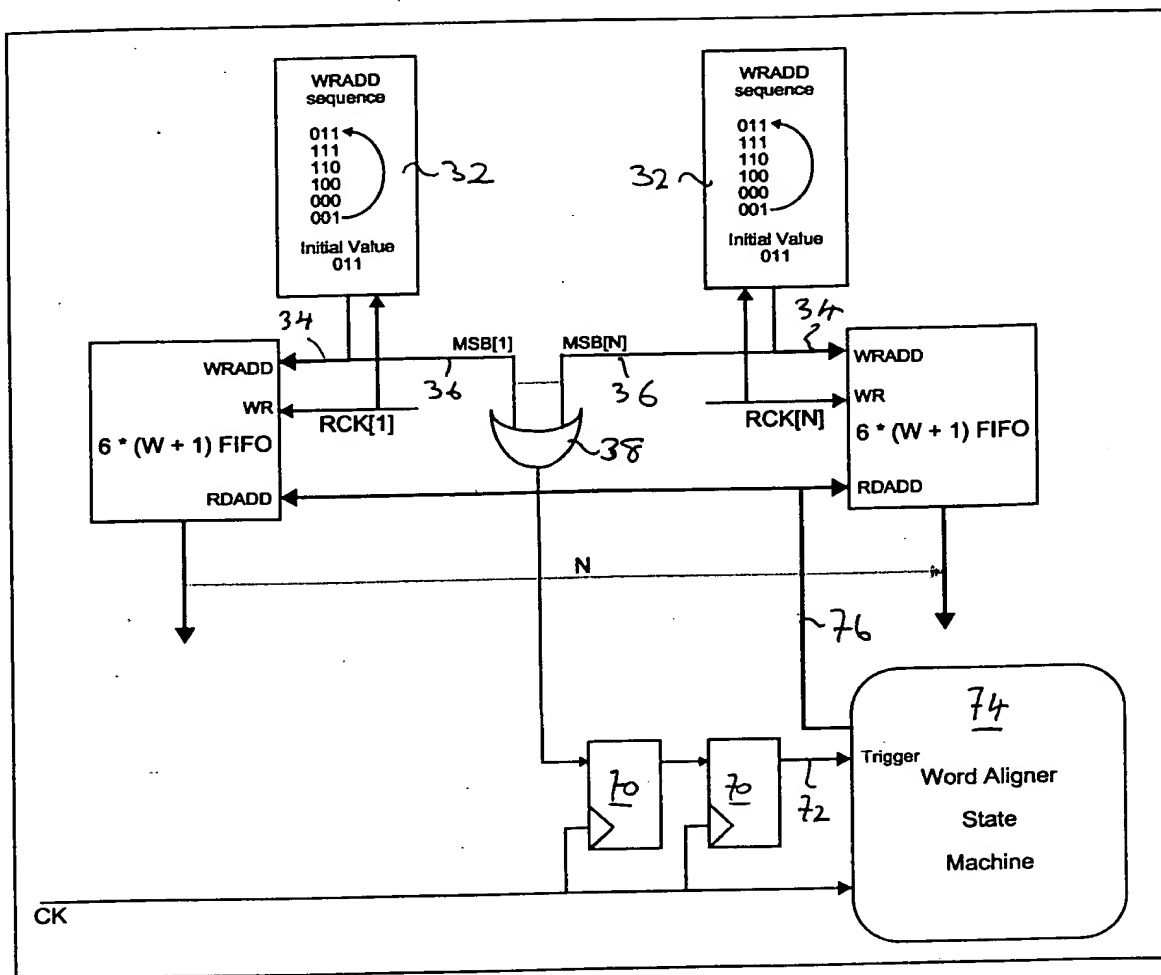


Figure 3 - Word Aligner Trigger

**THIS PAGE BLANK (USPTO)**

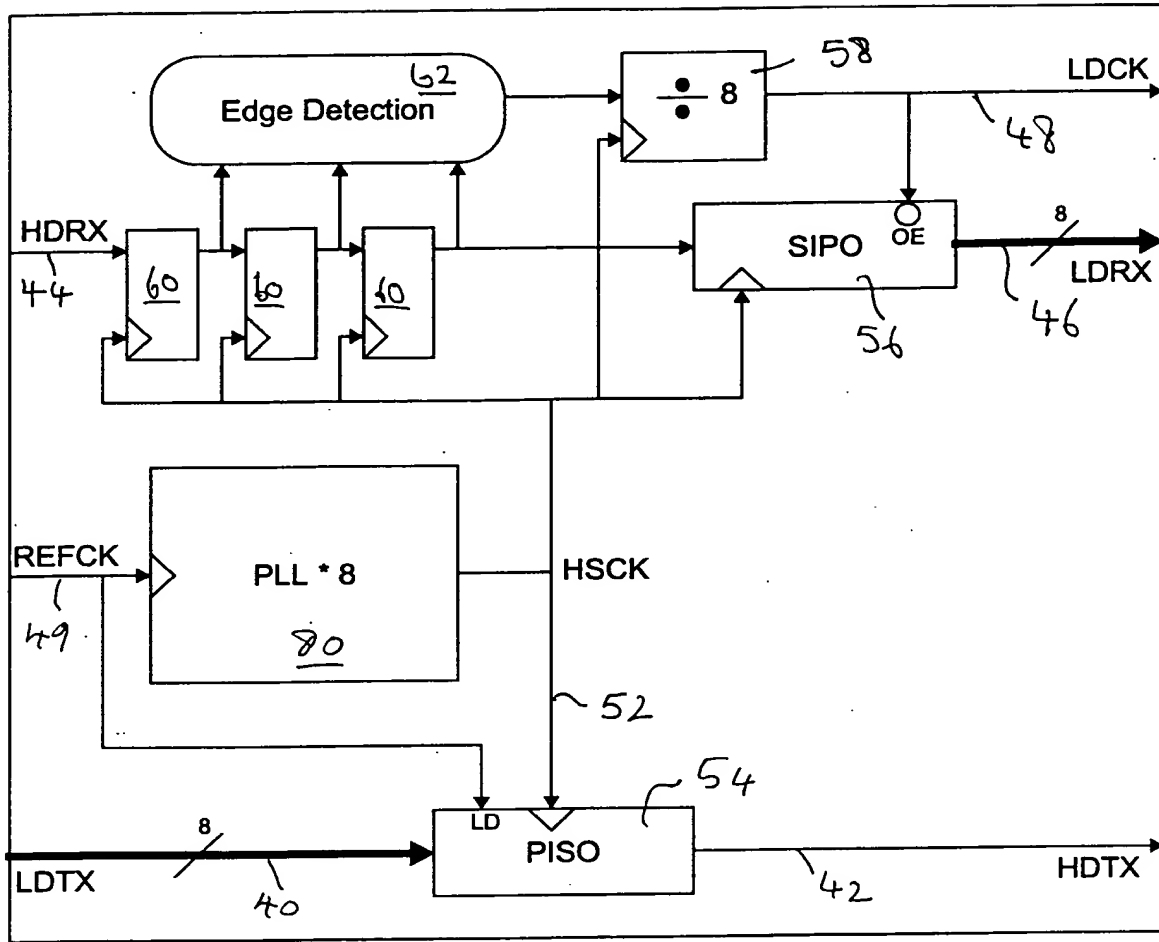


Figure 4 - Clock Data Recovery Module (block diagram)

**THIS PAGE BLANK (USPTO)**